Proline UK IP STARLIGHT Series
Megapixel IP Starlight Box Camera

Features

5 megapixel resolution(2592×1944)
30fps@5MP(2592×1944),60fps@2MP(1920×1080)
H.265 Main Profile, H.264 Baseline/Main Profile/High Profile
WDR (120dB)
Day/Night(ICR),3D DNR,AWB,AGC,BLC
SD storage(up to 64GB)
Built-in Alarm,Audio,RS485 interface
Support mobile phone monitoring & P2P function
PoE (Optional)
Power DC12V

PR-IP 8000 BSL Series

SPECIFICATIONS

Model	PR-IP 8022 BSL	PR-IP 8030 BSL	PR-IP 8050 BSL
Image Sensor	1/1.9" 2MP progressive scan CMOS	1/2.8" 3MP progressive scan CMOS	1/1.8" 6MP progressive scan CMOS
Shuttle time	1/5s to 1/50,000s		
Min Illumination	Color:0.1 Lux /F1.2; B/W:0.001 Lux /F1.2	Color：0.3 Lux /F1.2 B/W：0.005 Lux / F1.2;	Color:0.2 Lux /F1.2; B/W:0.003 Lux /F1.2
Lens Mount	C/CS Mount		
Auto Iris	DC drive		
Day&Night	IR cut filter with auto switch		
Video Compression	H.265/H.264/MJPEG		
Coding standard	H.265 Main Profile, H.264 Baseline/Main Profile/High Profile,		
Audio Compression	G.711a/G.711u/RAW_PCM		
Audio Bit Rate	G.711a(8kbps)/G.711u(8kbps)/RAW_PCM(16kbps)		
Max Image Size	1952(H)×1241(V)	2065(H)×1565(V)	2592(H)×1944(V)
Stream	Dual-stream		
Frame Rate	Main Stream：50Hz:25fps (1920 × 1080);	Main Stream : 50Hz:20fps (2048 × 1520),	Main Stream：30fps@ (2592 × 1944);
	60fps @(1920 × 1080)		
	Sub-stream : 50Hz: 25fps(640 × 480)；60Hz: 30fps (640 × 480);		
Memeory Slot	SD/SDHC (Max 64GB)		
Alarm Trigger	Motion detection, tampering alarm, network disconnect, storage exception		
Protocols	IPv4/IPv6、RTSP/RTP/RTCP、TCP/UDP、HTTP、DHCP、DNS、FTP、DDNS、PPPoE、SMTP、QOS、Onvif		
Onvif	V2.4 Version		
Browser	IE(8、9、10、11),Chrome, Firefox, Safaribetc, etc		
Software Development Kit	Linux/Windows C++/C SDK		
Audio In	1-channel 3.5mm audio interface MIC IN/Line IN		
Audio Out	1-channel 3.5mm audio interface (line level,600Ω)		
RS485	Yes (half duplex)		
Alarm	1 In/1 Out		
Video Out	1Vp-p Composite Output （75Ω/BNC）		
Network	1 RJ45 10M/100M adaptive Ethernet port		
Reset	A reset button (press and hold 3 seconds valid)		
Operating Conditions	-40℃ ~ 60℃,humidty less than 95%		
Power Supply	DC12V±10%, PoE (802.3af)		
Power Consumption	2.5W		

DIMENSIONS

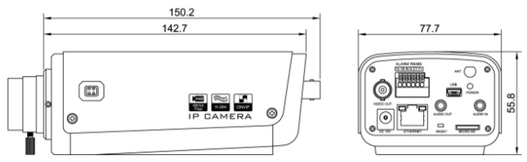

Proline UK IP STARLIGHT Series
Megapixel IP Starlight Mini Vandal Dome

PR-IP 8440 MVD

Features

4 megapixel resolution(2592×1520)
20fps@4MP(2592×1520),
30fps@3MP(2048×1520;2304×1296)
H.265 Main Profile, H.264 Baseline/Main Profile/High Profile
Advanced H.264 High Profile Level@4 compression
Day/Night(ICR),3D DNR,AWB,AGC,BLC
Lens(3.6mm/6mm) (Optional)
Mobile phone monitoring and P2P function
PoE (Optional)
IP66 rating
Power DC12V

SPECIFICATIONS

Model	PR-IP 8440 MVD
Image Sensor	1/3" 4MP progressive scan CMOS
Shuttle time	1/5s to 1/50,000s
Min Illumination	Color：0.3 Lux /F1.2 B/W：0.005 Lux / F1.2;0Lux IR On
Lens	3.6mm/6mm optional
Day&Night	IR cut filter with auto switch
DWDR	80dB
Compression	H.265/H.264/MJPEG
Video Compression	H.265 Main Profile, H.264 Baseline/Main Profile/High Profile,
Coding standard	2592(H)×1520(V)
Max Image Size	Dual-stream
Stream	Main Stream：20fps @ (2592 × 1520); 30fps @ (2048 × 1520/2304 × 1296);
	30fps @ (1920 × 1080); 30fps @ (1280 × 720)
Frame Rate	Sub-stream : 50Hz: 25fps(640 × 480)；60Hz: 30fps (640 × 480);
Alarm Trigger	Motion detection, tampering alarm, network disconnect, storage exception
Protocols	IPv4/IPv6、RTSP/RTP/RTCP、TCP/UDP、HTTP、DHCP、DNS、FTP、DDNS、PPPoE、SMTP、QOS 、Onvif
Onvif	V2.4 Version
Browser	IE(8、9、10、11),Chrome, Firefox, Safaribetc, etc
Software Development Kit	Linux/Windows C++/C SDK
Network	1 RJ45 10M/100M adaptive Ethernet port
Reset	A reset button (press and hold 3 seconds valid)
Operating Conditions	-40℃ ~ 60℃,humidty less than 95%
Power Supply	DC12V±10%, PoE (802.3af)
Power Consumption	＜2.5W
Weather proof rating	IP66
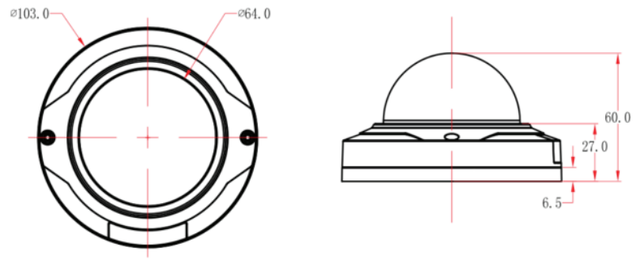
DIMENSIONS