

**Infrared Sensor Buttons
PRB-1000AI/ 1000BI**



PRB-1000AI

PRB-1000BI

MODEL	PRB-1000AI / 1000BI	
Input	DC 12V	
Contact Rating	12~28V, 3A	
Output Contact	NO/NC/COM	
Mechanical Life	500,000 tested	
Suitable	Hollow Door	
Operating Temp	-20°C ~ +55°C	
Humidity	0~95% Rh	
Detection Range	0.1~10cm	
	OFF	White
LED Indicator	Standby	Blue
	Sensation	Red
Weight	0.148Kg (0.144Kg)	
Dimensions (LxWxH)	86x86x29mm / 115x70x29mm	

**Door Release Push Buttons
PRB-1000A/ 1000B/ 1000C**

MODEL	PRB-1000A	PRB-1000B	PRB-1000C
Current Rating	3A @ 36V DC Max		
Output Contact	NO/NC/COM		
Mechanical Life	500,000 tested		
Suitable	Hollow Door		
Operating Temp	-10°C ~ +55°C		
Humidity	0~95% Rh		
Weight	0.16Kg	0.25Kg	0.1Kg
Dimension	86x50x20	86x86x20	91x28x20



PRB-1000A


PRB-1000B

PRB-1000C

SELECTION

PRB-1000A Door Release push button Aluminum Panel, Steel Button & Sandblast Material
 PRB-1000B Door Release push button Aluminum Panel, Steel Button & Sandblast Material
 PRB-1000C Door Release push button Stainless Steel Panel, Steel Button with wire drawing

**Remote Controlled Door & Gate Opener
PRB-150T/PRB-150R**

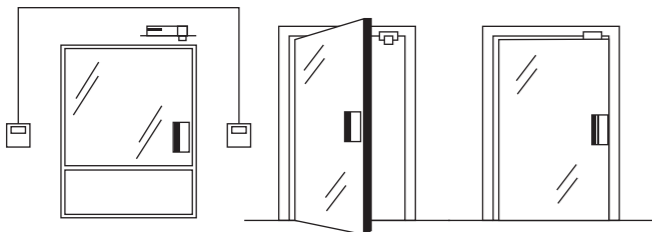

PRB-150T/250T

PRB-150R/250R

Size (LxWxH) mm	75x55x28
Current	DC 12V, 80mA
Remote Distance	15m
Suitable	Lock/Gate

**Mifare Proximity Cards
MF-01/ MF-02**


MODEL	MF-01	MF-02
IC Card	Mifare thin card	Mifare thin card
Chip type	Phillips Original chip	Common chip
Sensing distance	2~10cm	2~10cm
Working frequency	13.56MHz	13.56MHz
Reading time	1~2ms	1~2ms
Erasing & writing times	100000 times	100000 times
Data save	>10 Years	>10 Years
Card size	86x54x0.8mm	86x54x0.8mm
Packaging material	PVC, ABS	PVC, ABS



MODEL	KT-01	
Erasing & writing times	100000 times	
IC Card type	Key tag	Data save
		>10 Years
Sensing distance	5~15cm	Card size
		86x54x0.8mm
Working frequency	125MHz	Packaging material
		PVC
Reading time	1~2ms	

**Single Door Magnetic Lock (with LED 600 LBS)
PRL-700**

MODEL	PRL-700D	PRL-700D
Lock Size (LxWxH)	250x47x25mm	
Armature plate	180x38x11mm	
Holding Force	280Kg (600lbs)	
Dual voltage	DC 12V/ DC24V	
Current Draw	DC12V/ 480mA, DC24V / 240mA	
Fail Safe	Locked when energized	
Time Delay	0 Sec	0/ 3/ 6/ 9sec
Safety function	Built-in voltage spike suppressor	
Opening mode	90 degree swinging door	
Suitable for	Wooden, Glass, Metal & fire proof door	
Certification	CE & MA approved	
Net Weight	2Kg	

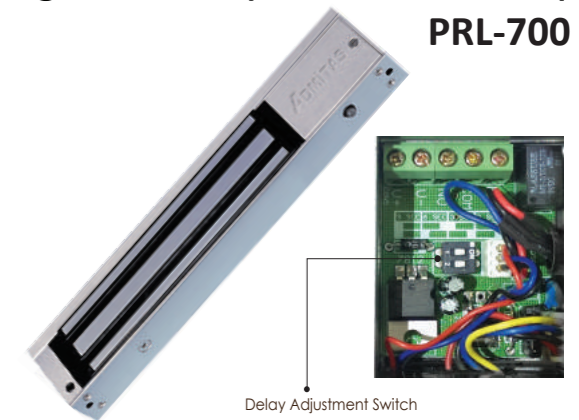

Delay Adjustment Switch

**Single Door Magnetic Lock (with LED 1200 LBS)
PRL-750**

MODEL	PRL-750
Lock Size	266x67x39mm
Holding Force	500Kg (1200lbs)
Current Draw	420mA at 12V, 210mA at 24V
Suitable for	Wooden, Glass, Metal & Fire proof door
Feature	Fail safe



PRL-750

**Single Door Magnetic Lock with Door & Lock Sensor
PRL-790DLS**

MODEL	PRL-790DLS
Lock Size (LxWxH)	250x48.5x25mm
Armature plate	180x38x11mm
Holding Force	280Kg (600lbs)
Dual voltage	DC 12V/ DC24V +10%
Current Draw	12V/500mA, 24V/250mA
Contact	+, -
Lock Signal	NO/COM/NC
Door Signal	NO/COM/NC
Suitable for	Wooden, Glass, Metal, Fireproof & Sliding Door
Certification	CE & MA
Weight	2.1 Kg



FEATURES

Special Design, Suitable for Access Control
 Produced with High Quality Electronic components
 Multifunctional Output Contact, Suitable for Multifunctional Request
 Built-in Backup Charger for battery
 Supplies uninterruptible power for 7 hours

**Un-interrupted Power Supply for Access Control
PR-UPS 1203**

MODEL	PR-UPS 1203
Input Voltage	220VAC+10%;50/60HZ
Output Voltage	DC12V/3A
Time relay	0~15sec.
Output Contact	Access control, Electric Lock, Release
Optional Accessories	Button
Standard design	Backup Battery, 12V/7H
Protect safely	Painted Steel IP54 rated
Suitable for	Short Circuit protection
Weight	Access control, Electric lock
Dimensions mm	2.58kg

