

Features

- Embedded Linux System
- H.264 High Profile Video Compression
- Playback (4 channel)
- Network Interface RJ45 100M
- P2P Network Penetration Function
- 2 SATA (Optional)
- Power DC12V




PR-HD 7100 HS Series

SPECIFICATIONS

Product Model	PR-HD 7104 HS	PR-HD 7108 HS
Operating system	Embedded linux system	Embedded linux system
Video compression standard	H.264 High profile	H.264 High profile
Video surveillance quantity	PAL (625TVL, 50site/s); NTSC (525TVL, 60site/s)	PAL (625TVL, 50site/s); NTSC (525TVL, 60site/s)
Biggest decoding ability	coding 1080P @ 60FPS;720P @ 120FPS decoding 1080P @ 60FPS;720P @ 120FPS	coding 1080P @ 60FPS;720P @ 120FPS decoding 1080P @ 60FPS;720P @ 120FPS
Video input	4CH SDI	8CH SDI
Video output	1 * CVBS, 1 * VGA ,1 * HDMI	1 * CVBS, 1 * VGA ,1 * HDMI
Video intelligent	The motion detecting: default open,level: medium Video lost: default open, support	The motion detecting: default open,level: medium Video lost: default open, support
PlayBack	Local(4 channel) and remote playback(4 channel)	Local(4 channel) and remote playback(4 channel)
Main stream	1080P (15 frame stream, 4096K), 720P (25 frame stream, 4096K)	1080P (15 frame stream, 4096K), 720P (25 frame stream, 4096K)
Deputy stream	default CIF5 frame, can set VGA (640*480), 512kbps	default CIF5 frame, can set VGA (640*480), 512kbps
Network interface	RJ45 10M/100M Adaptive Ethernet front-end ports	RJ45 10M/100M Adaptive Ethernet front-end ports
Browser support	IE then increase support RTSP, apple, Google, firefox browser	IE then increase support RTSP, apple, Google, firefox browser
Phone monitoring	support iPhone Android phone browser	support iPhone Android phone browser
Yuntai monitor	P2P Network penetration function	P2P Network penetration function
Yuntai	support one RS485	support one RS485
Hard disk interface	2 Hard disk interface	2 Hard disk interface
USB interface	one USB1.1 ; two USB2.0,support USB Update Flash program (OTG)	one USB1.1 ; two USB2.0,support USB Update Flash program (OTG)
VGA interface	support 1024*768,1280*720, 1280*1024,1920*1080 The resolution of rate ; default 1024*768	support 1024*768,1280*720, 1280*1024,1920*1080 The resolution of rate ; default 1024*768
External alarm	no	no
Power	DC12V,Power consumption 4.5W (With no hard drive)	DC12V,Power consumption 4.5W (With no hard drive)
Size	160*80mm	160*80mm

Dimensions

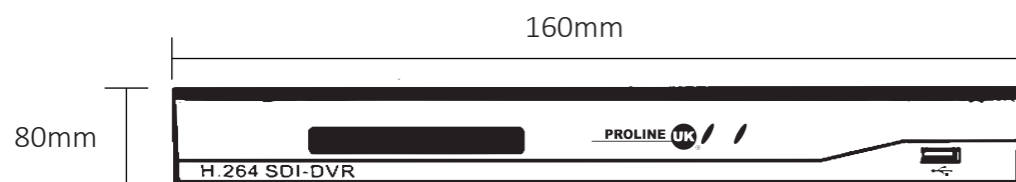

**IPCCTV
SYSTEMS**

- IP HD CCTV Cameras*
- Network Video Recorders*
- High Speed Dome*
- 360 FishEye Camera*



PROLINE UK ELECTRONICS LTD.is the registered member of HD CCTV Alliance Limited, Australia

PROLINE UK ELECTRONICS LTD. is the member of Onvif Open Network Video Interface Forum ,California.