

Features


- Onvif Support
- P2P function, a key to the Internet
- Humanized design, easy to operate
- Supports a variety of mobile devices
- Support dual-stream
- CMS Centralized Network Management Software
- 64 Ch free Access Software
- HDMI/VGA, video output,
- 4Ch Alarm, RS485, USB 2.0 X 2
- Support 2 SATA HDDs up to 4TB
- 4 ch 920P or 2ch 1080P2+ch 720P playback
- 4Ch, 9Ch & 16Ch IP Camera Support



SPECIFICATION

Model	PR IP-8804 NVR	PR IP-8809 NVR	PR IP-8816 NVR
Main Processor		High performance embedded microprocessor	
Operating system		Embedded LINUX OS	
Video compression format		H.264	
Display Image Resolution		D1@30fps;720P@30fps; 960P@30fps;1080P@30fps	
Playback Image Resolution		720P@30fps;960P@30fps;1080P@30fps	
Motion Detection		192(16x12)pcs motion detection area Each channel multi-level sensitivity (1-6 levels adjustable)	
Privacy Masking		Optional (IPC)	
Audio compression format		ADPCM	
2-way Audio		1Ch	
Recording Mode	Manual Recording, Motion Detection Recording, Time Recording, Alarm Recording,		
Recording Storage	HDD,Network		
Frame rate	30 fps NTSC;25fps PAL		
Recording Playback	Max suport 4ch 960P or 2ch 1080P Synchronously playback		
Backup Mode	Support HDD,USB Flash Disk store & backup		
Network Video Input	4Ch	9Ch	16Ch
Video output	1ch VGA and 1ch HDMI		
Audio Input	4ch IPC Composite Audio	9ch IPC Composite Audio	
Audio Output	1ch (audio intercom)		
Alarm Input	4ch Alarm Input(optional)		
Alarm Output	1ch Alarm Output(optional)		
Network	1x10/100Mbps,RJ45 port		
RS485	Standard 485 port,support half-duplex,		
USB	2 USB 2.0 ports		
HDD	Support 2pcs 2TB SATAx4TB HDD inside		
Power	DC +12V /4A		
Power consumption	16W-18W(not include HDD and PoE)		
Operation temperature	0°C~55°C		
Operation humidity	10%~90%		
Demension	252*213*42mm(0.8u hight)		
Weight	1.5--1.8KG(without HDD)		

INSTALLATION

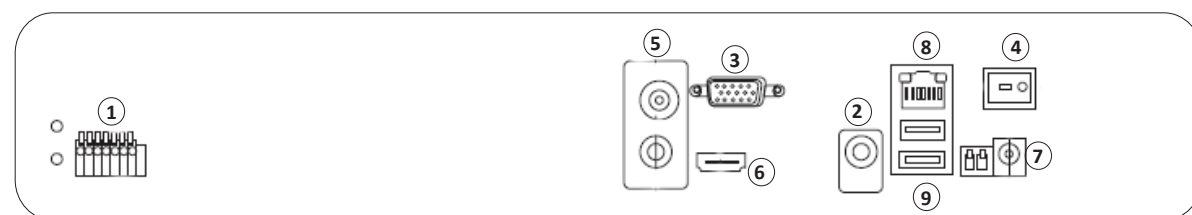

- 1 : Alarm Input
- 2 : Audio In
- 3 : VGA out
- 4 : Power Switch
- 5 : AV Out
- 6 : HDMI Out
- 7 : DC 12V In
- 8 : Network Interface
- 9 : USB Ports



PROLINE UK ELECTRONICS LTD. is the member of Onvif (Open Network Video Interface Forum)

Features

- Onvif 2.2 Support
- User Friendly GUI
- CMS Software 64 Channels Free
- HDMI/VGA/ CVBS, video output
- 1ch Audio output, 1ch Intercom, RS 485
- Support 8 SATA HDDs up to 4TB, 2USB 2.0,
- 16ch Alarm input 3ch Alarm output
- 32Ch D22 / 1Ch 720P /16Ch 1080P@30fps
- 16Ch D1 Sync Playback/ 8ch 720P sync playback/4ch 1080P playback
- Support DDNS P 2P
- iPhone,Android,Symbian,Windows,Blackberry Support
- 5MP/3MP 1080 p/960p/720p Support
- 1 RJ10 45M/100 M/1000M Network Interface
- Support remote add IPC



PR-IP 8832 NVR



PR-IP 8825 NVR

SPECIFICATION

Model	PR IP-8832/8825 NVR
Operating system	Emberdded LINUX
IPC input	32ch D1 / 22ch 720P / 16ch 1080P@30fps
Protocol support	ONVIF Core Spec 2.2 , Compatible with Standard ONVIF IP cameras
Intercom	1ch RCA
CVBS Output	1ch BNC (1.0Vp-p,75ohms)
VGA Output	1ch ,resolution optional (1920x1080,1280x1024,1280x720,1024x768,800x600)
HDMI Output	1ch, resolution optional(1920x1080,1280x1024,1280x720,1024x768,800x600)
Audio output	1CH RCA
Video compression	H.264/MPEG 4 AVC, up to Main Profile 5.0
Video resolution	5MP/3MP 1080p/960p/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Video Frame Rate	1 ~ 30 frames
Video bitrate	48Kbps~12288Kbps/
Stream type	A composite audio stream
Audio compression	G.711A
Audio bitrate	64Kbps
Local playback	1~16ch sync playback
Mobile surveillance	Support Iphone,android,symbian,windows,blackberry
DDNS, P2P	Support
SATA interface	8 x4TB SATA
Network interface	1 RJ45 10M/100M/1000M adjust-automatically Ethernet interface
USB interface	2 USB2.0 high-speed interface
Alarm input	16ch
Alarm output	3ch
RS-485	Support 1CH RS485
Installation	Rack mounting, Desktop Installation (optional)
Power supply	AC 110V~240V
Working temperature	-10°C-- +55°C
Working Humidity	10%~90%
Dimension	2U, 445x440x89 (mm)



PROLINE UK ELECTRONICS LTD. is the member of Onvif (Open Network Video Interface Forum)